



Description

ROBINHOOD SLIM SUPERTUB WITH S/S GOOSENECK TAP
 STSLIMTAPX

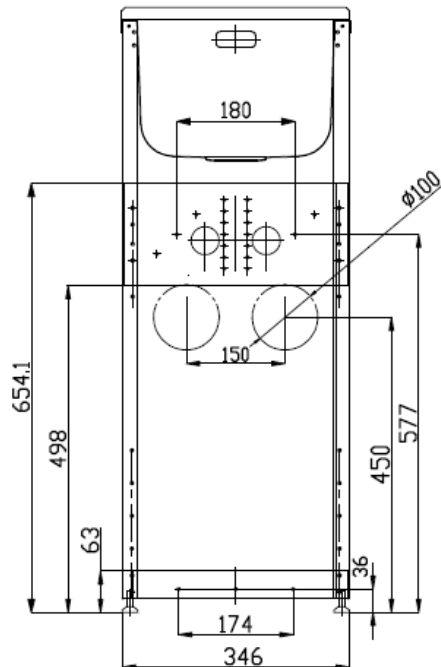

Dimensions

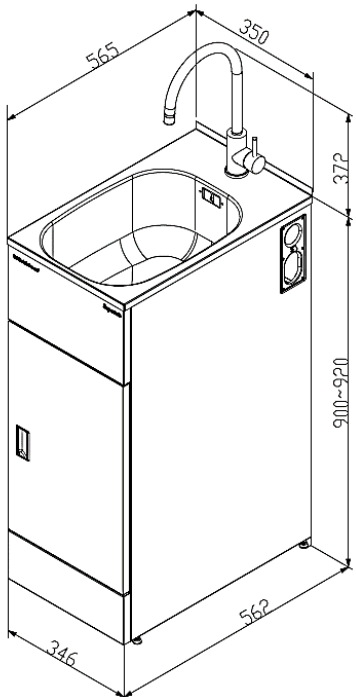

Dated 13/06/2022

Specifications

Tapware

Tapware type	#304 Stainless Steel Gooseneck Tap
WELS rating	5 Stars, 5.5L per minute
Max & Min pressure	Maximum pressure 72.5 PSI (500 kPa); Minimum pressure 22 PSI (150 kPa)
Temperature range	Recommended temperature range 5° to 65°C; Maximum temperature 80°C

Sink

Bowl type	0.8mm polished #304 Stainless Steel
Bowl capacity	24L gross capacity measured to the top; 17L capacity to overflow
Waste type/ discharge flow rate	Plug waste/ 60L per minute
Overflow/ flow rate	Yes/ 30L per minute

Cabinet

Handle type	Recessed plastic handle
Door opening	Reversible, can be either left or right hand opening
Adjustable levelling feet	Yes
Side apertures for hoses	Yes, on both sides
3 Way ball valves isolators	Yes, included
Washing machine waste pipe	Separate
Cabinet color/finish	Satin white powder coated
Cabinet material	0.6mm galvanized steel
Maximum height of items can be stored	510mm

Dimensions & Weights

Product dimensions (mm)	W350*D565*H(900-920)
Carton dimensions (mm)	W368*D585*H965
Gross/Net weight (Kg)	17/14

Warranty

Tapware & Cabinet	2 years on parts & labour from the date of purchase
Sink	5 years on parts & labour from the date of purchase