



Builder Project Rail Shower

Nero

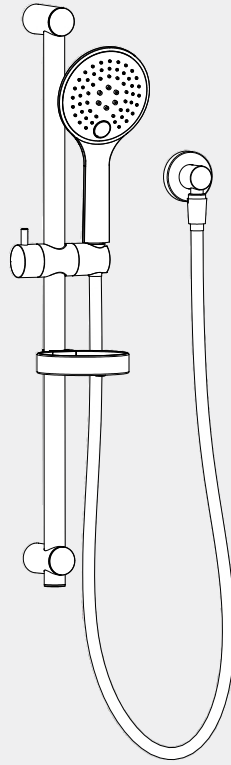

Versions:202401

Drawing

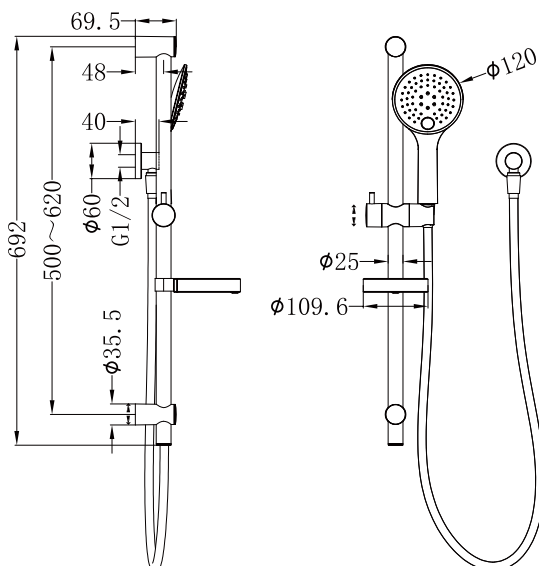

Specifications

Watermark License

WM-060093

Temperature Rating

Min 1°C-Max 75°C

Pressure Rating

Min 150kpa - Max 500kpa




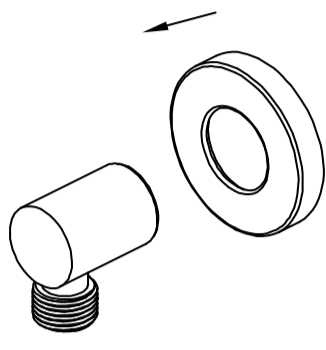
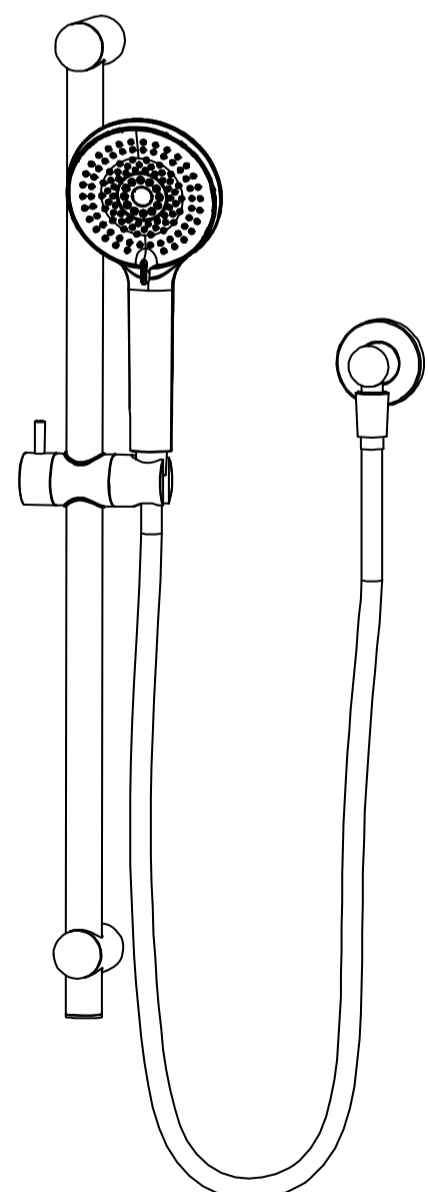

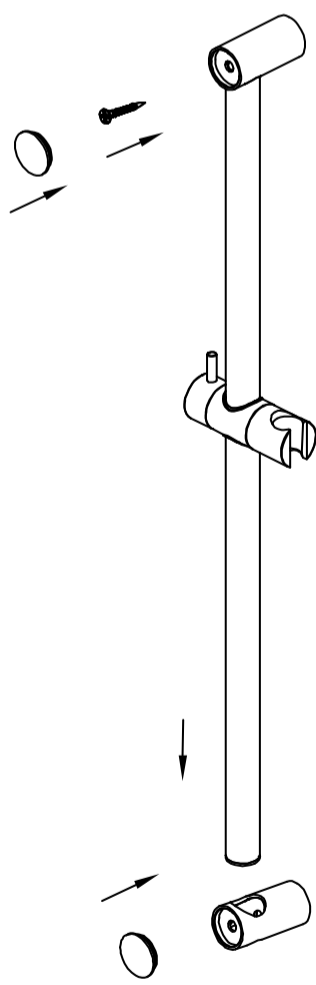
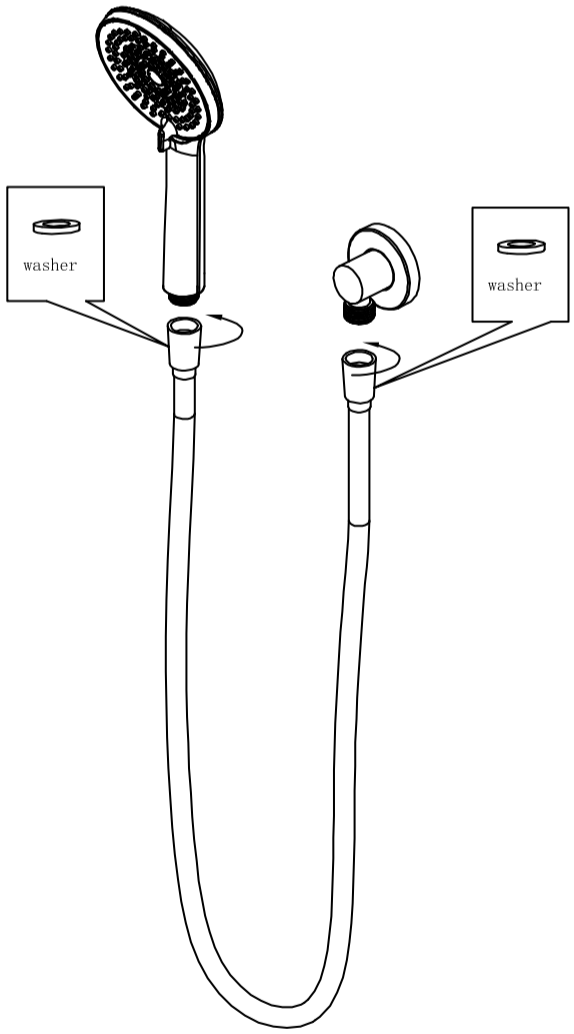
Finish & SKU

● Brushed Nickel
NR232105aBN

Packaging Includes

1x Handle Shower (Built- In Check Valve)
1x Shower Hose
1x Elbow
1x Shower Rail

*Dimensions are nominal measurements only.
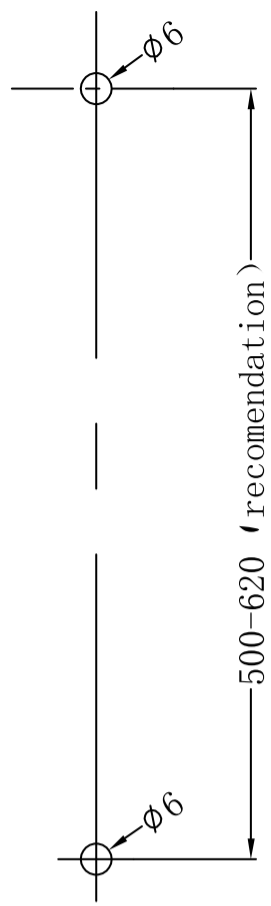
<p>use Teflon tape</p>  <p>1. Put Teflon tape on outlet thread.</p>	 <p>4. Drill two $\phi 6$mm holes according to above picture.</p>	 <p>5. Mount bottom bracket on the $\phi 6$ hole by expansion plug and tapping screw.</p>
 <p>2. Pull dressing ring on the elbow body.</p>		 <p>8. Test for leaks.</p>
 <p>3. Screw elbow body on to outlet.</p>		
 <p>6. Plug shower rail in bottom bracket. Mount top bracket on the top hole by expansion plug and tapping screw. Push plates onto two brackets.</p>	 <p>7. Connect hand shower with outlet by shower hose</p>	

Nero

info@nerotapware.com.au
nerotapware.com.au

11-13 Buontempo Road
Carrum Downs Vic 3201

