

# X Plus Wall Basin Set 180mm




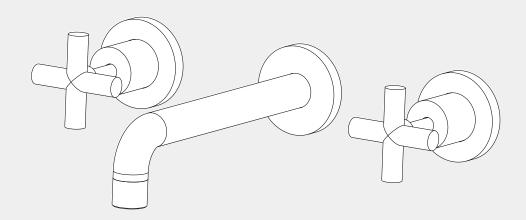

Versions:202401

## Top/Back





Note: In Wall Body/ Breech Not Included.

### Specifications

Watermark License
WM-060073
Temperature Rating
Min 1°C-Max 75°C
Pressure Rating

Min 150kpa - Max 500kpa

### Packaging Includes


1x Spout 2x Hand Wheels


#### Finish & SKU

Matte Black NR201607bMB Brushed Gold NR201607bBG

\*Dimensions are nominal measurements only.

Nero ——— 2 X Plus Wall Basin Set 180mm-Manual

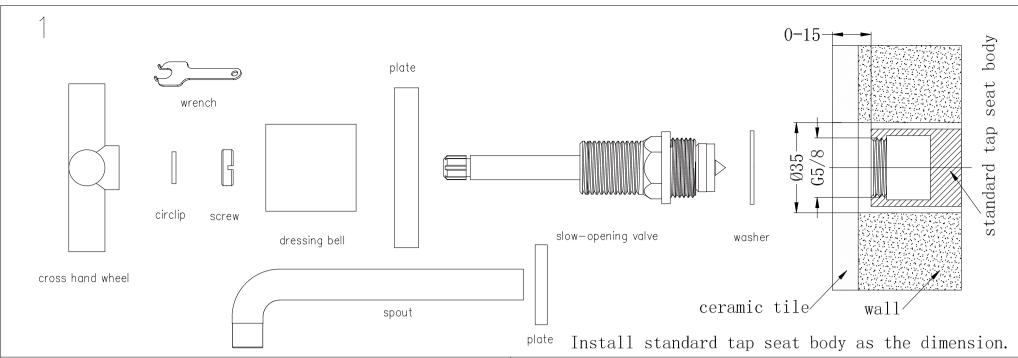


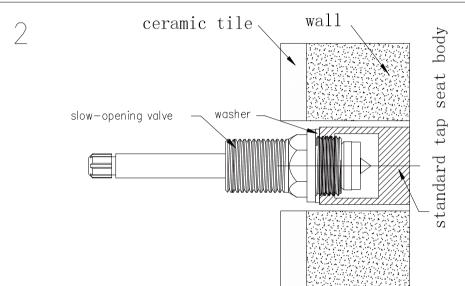


- 1. Put on the washer on the slow-opening valve.
- 2. Screw the slow-opening valve onto the body tightly.
- ceramic tile wall

  dressing bell plate


  plat
- 1. Put plate onto slow-opening valve.
- 2. Screw dressing bell tightly on the slow-opening valve.

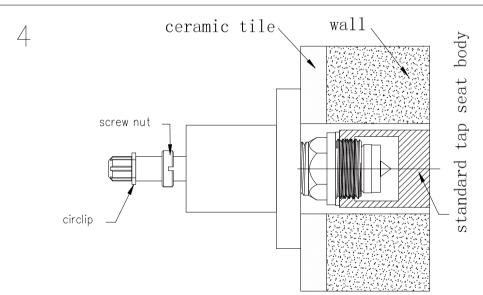

- 1. Put screw onto the stick of slow-opening valve.
- 2. Put circlip onto gap of slow-opening valve.

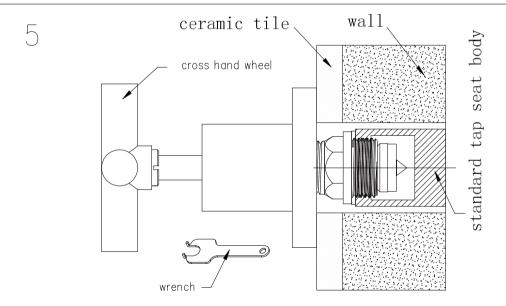

- 1. Put cross hand wheel onto stick of slow-opening valve, then adjust the rotation angle of hand wheel.
- 2. Use wrench to make screw into cross hand wheel, then tighten it up.

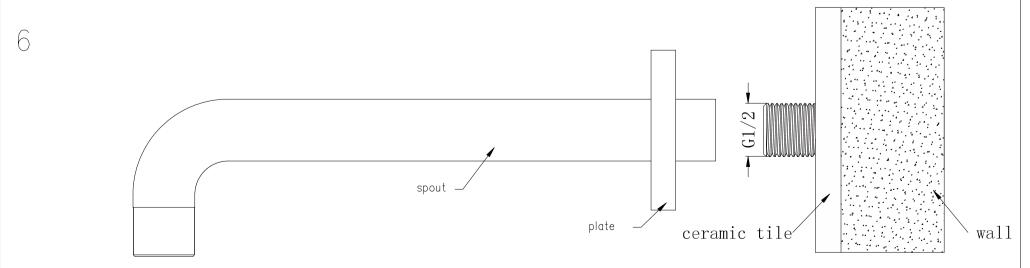

- 1. Put plate into spout.
- 2. Put spout onto the outlet, then put plate onto the ceramic tile.





