


# York Shower Mixer With Divertor



#### Versions:202405

#### Drawing





#### Specifications

Watermark License WM-060073 **Temperature Rating** 

Min 1°C-Max 75°C **Pressure Rating** 

Min 150kpa - Max 500kpa Finish & SKU



- AGED BRASS WITH WHITE PORCELAIN LEVER NR692109a01AB
- BRUSHED NICKEL WITH WHITE PORCELAIN LEVER NR692109a01BN
- POLISHED NICKEL WITH WHITE PORCELAIN LEVER NR692109a01PN
- CHROME WITH BLACK PORCELAIN LEVER

NR692109a03CH

\*Dimensions are nominal measurements only.

#### Packaging Includes

1x Body Set 1x Handle 1x Plate 1x Diverter

1x Accessories Pouch




AGED BRASS WITH METAL LEVER NR692109a02AB


BRUSHED NICKEL WITH METAL LEVER NR692109a02BN


POLISHED NICKEL WITH METAL LEVER NR692109a02PN

# Nero

### Installation Instruction

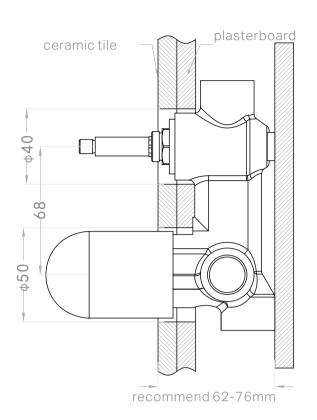

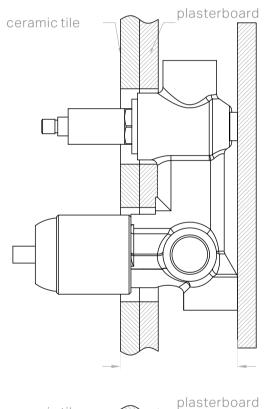

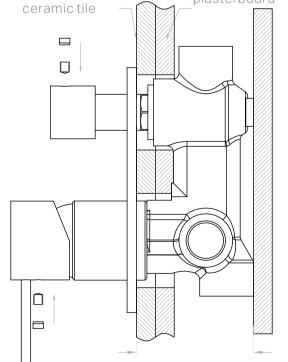

1. Fix body on noggin and ensure installation depth is 62-76mm from noggin to ceramic tile.

 $2. Connect \, cold \, water \, hose \, and \, hot \, water \, hose \, and \, \, test \, for \, leakage.$ 

3.Install plasterboard and ceramic tile after drilling a  $\phi50$  and a  $\phi40$  hole according to the right drawing.

4. Remove the plastic sleeve and install sleeve of divertor.

5.Install plate, handle and knob.

www.nerotapware.com.au York Shower Mixer With Divertor - Manual

Nero ——— 3

# Nero

