





York Wall Top Assemblies

Nero

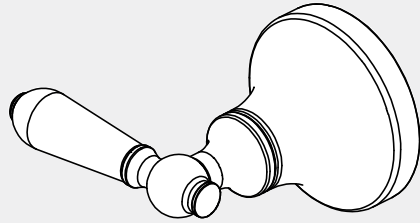

Versions:202405

Drawing



Specifications

Watermark License

WM-060073

Temperature Rating

Min 1 °C-Max 75 °C

Pressure Rating

Min 150kpa - Max 500kpa

Packaging Includes

2x Wall Top Handles

	CHROME WITH WHITE PORCELAIN LEVER NR692109b01CH		CHROME WITH METAL LEVER NR692109b02CH
	MATTE BLACK WITH WHITE PORCELAIN LEVER NR692109b01MB		MATTE BLACK WITH METAL LEVER NR692109b02MB
	AGED BRASS WITH WHITE PORCELAIN LEVER NR692109b01AB		AGED BRASS WITH METAL LEVER NR692109b02AB
	BRUSHED NICKEL WITH WHITE PORCELAIN LEVER NR692109b01BN		BRUSHED NICKEL WITH METAL LEVER NR692109b02BN
	POLISHED NICKEL WITH WHITE PORCELAIN LEVER NR692109b01PN		POLISHED NICKEL WITH METAL LEVER NR692109b02PN
	CHROME WITH BLACK PORCELAIN LEVER NR692109b03CH		

*Dimensions are nominal measurements only.

1

1x grub screw 1x left handle 1x right handle 1x grub screw 2x lock nuts 2x washers 2x quick-opening valves
 2x washers 2x dressing bells 2x plates

2

15-25 38-48 23

ceramic tile wall standard tap seat body

- Install the breech (not included) in advance.

3

ceramic tile wall lock nut washer quick-opening valve standard tap seat body

- Position the quick-opening valve to the breech body, and screw it in place tightly.
- Slide the washer onto the valve's end, secure with the locking nut. Ensure all parts are snug.
- Test for leaks.

4

plate cutting gauge ceramic tile wall

- Screw the plate and cutting gauge onto the lock nut tightly, ensuring a secure fit.

5

cut off remaining thread ceramic tile wall

- Trim the excess thread flush with the cutting gauge.
- Smooth the trimmed edge.
- Test for leaks.

6

dressing bell ceramic tile wall Finished

Position the handles as shown in the image.

- Remove the cutting gauge.
- Attach the dressing bell.
- Place the washer inside the handle, fit it onto the tap body, and secure with the grub screw.

Nero

